


*Necessary preliminary tasks:*

- Remove panel for rear lid.

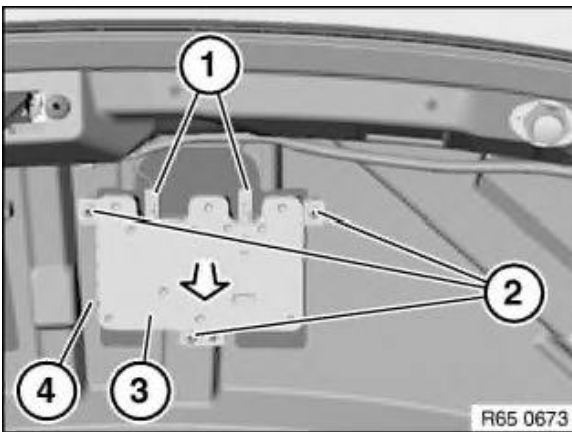

Unlock plug connections (1) and disconnect.

Release screws (2).

Remove multiple-band antenna (3) in direction of arrow from rear lid (4).