



Necessary preliminary tasks:

- Remove rear compartment fresh air grill.
- Remove trim for preselector lever (shift lever)

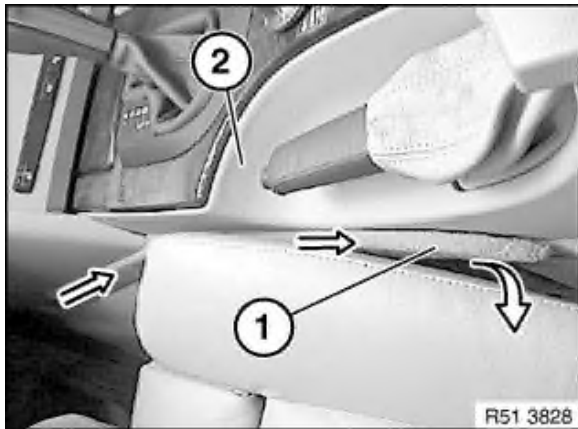


Lever out trims (1) on left/right at rear end and pull out in direction of arrow.

2 Center console

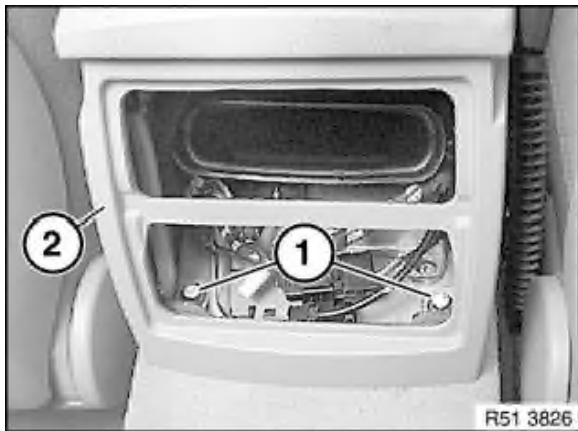

Release screws (1) on storage tray at rear.
If necessary, unlock plug connections.

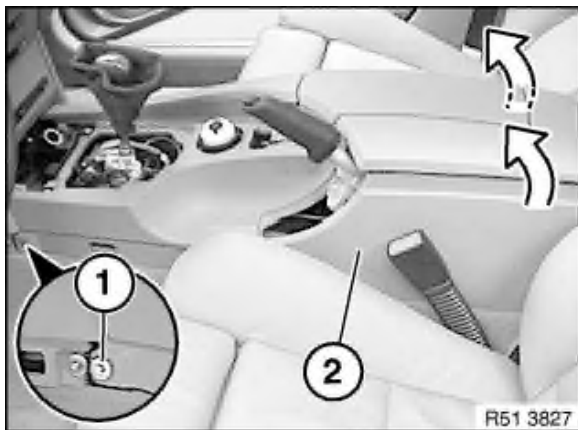

Release handbrake lever gaiter on storage tray (2).

Release screw (1) on left/right.


Lift storage tray (2) at rear.

Feed through handbrake lever towards bottom and unlock plug connections below storage tray.

If necessary, remove button unit.

Lift storage tray (3) at rear and at same time pull towards rear and feed out from handbrake lever.

Remove storage tray.

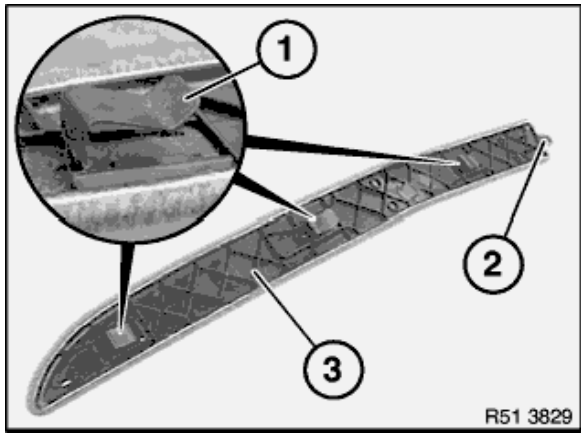

Installation:

Retainers (1) and guide (2) on trim (3) must not be damaged or missing.