


*Necessary preliminary tasks:*

- Remove rear bumper trim.

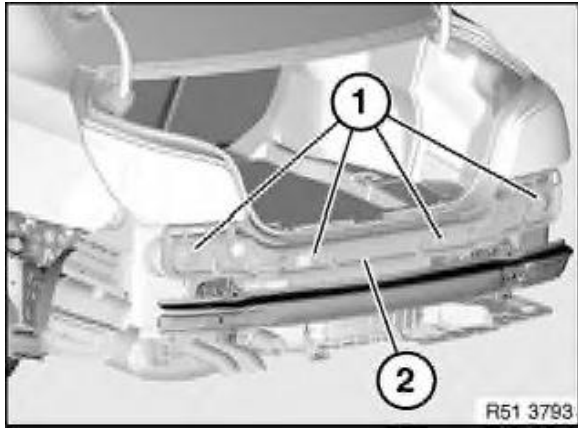

If necessary, disconnect wiring harness for PDC.

Release screws (1).

Remove guide (2).