

Install Guide:

IF-BMW60MP20/ IF-BMW60DVB50/IF-BMW60DVC61

The installing is recommended in the specialist who is educated.
Before the installing, you should read very carefully this install guide.
When this interface uses 12 volt, it is most suitable,

Regarding an installing all responsibilities are responsible for installer.
The head office is not responsible for automobile damage or a human damage support.

The case where the T.V is not loaded in the vehicle, please inquire about that function to your BMW branch or specialty seller.

Regarding an Installing:

Before you start to install, you have to separate the battery.

It will precede to establishment start, in establishment after all MOST (media intention system transmission standard) – the machineries and tools will lead with connection and they could be register newly in order, to separate the battery.

First, carefully open the car of cover.



Second, remove the two screws.




Pull out the blind and the air conditioner and fold that.
This time, if you pull out the plug from the origin air conditioner, your working will be easier.

. . Attention: Top part of the blind it is fixed with two screws, but the lower part piece connects with only the jar clip, so, be careful when you pull out.




Next step: Remove the down plastic blind which is coming to get inserted.

It releases 4 screws which DVD-Navigation is fixing empty in afterwards, you to pull out navigation empty completely.

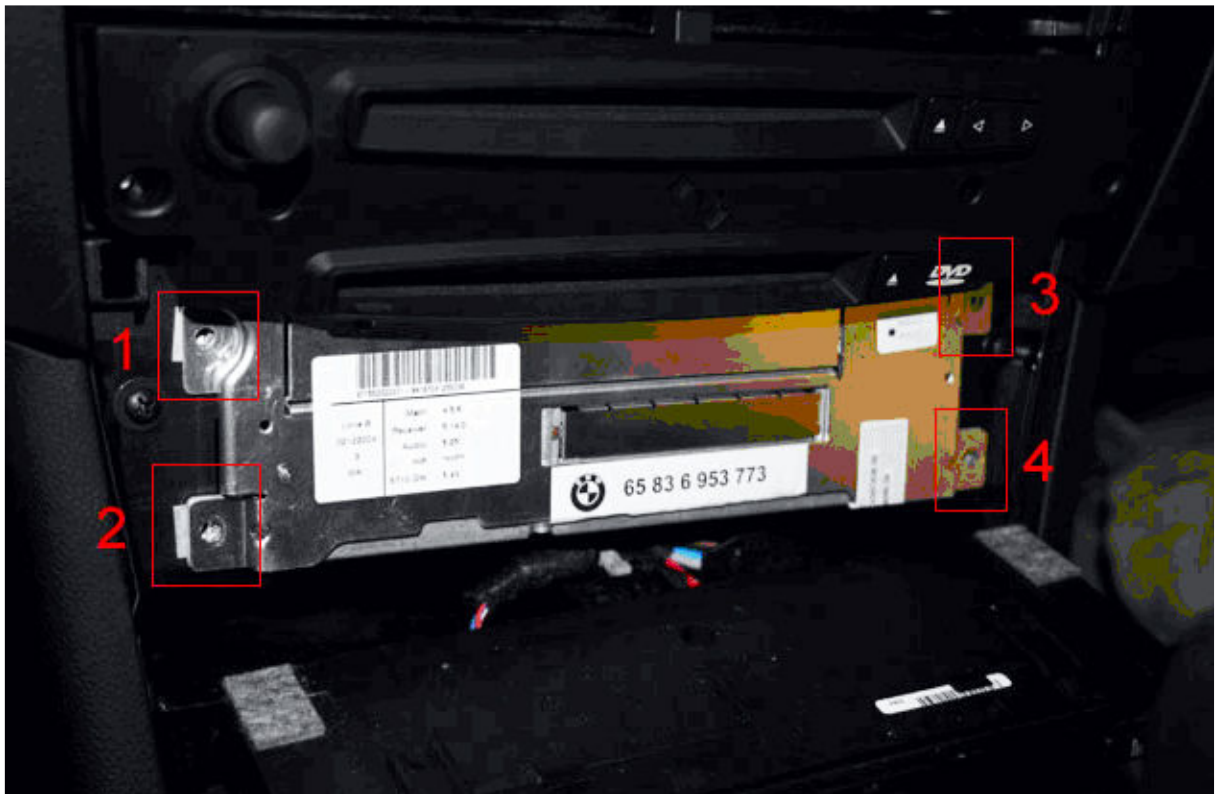


Take out the DVD Navigation and then take out the QUADLOCK (shown on the right side lower part of the photo) with the big black plug after taking out the DVD neDVD-

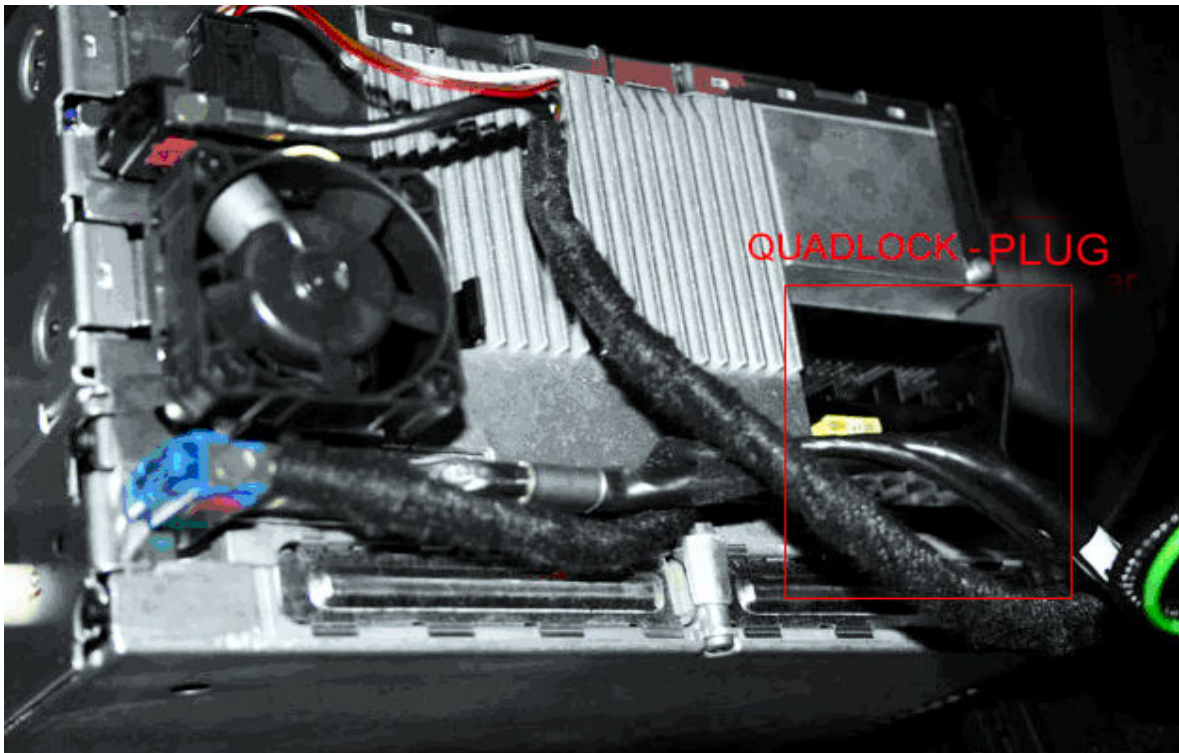

This QUADLOCK-plug is become accomplished with the multi plugs.
 From the big QUADLOCK-plug pulls out the white color terminal.
 The video transmission line fix.
 Interception (circuit) = PIN 11

The video– the transmission line (red or white) – the PIN4
(Connection structure refer to the lower part)

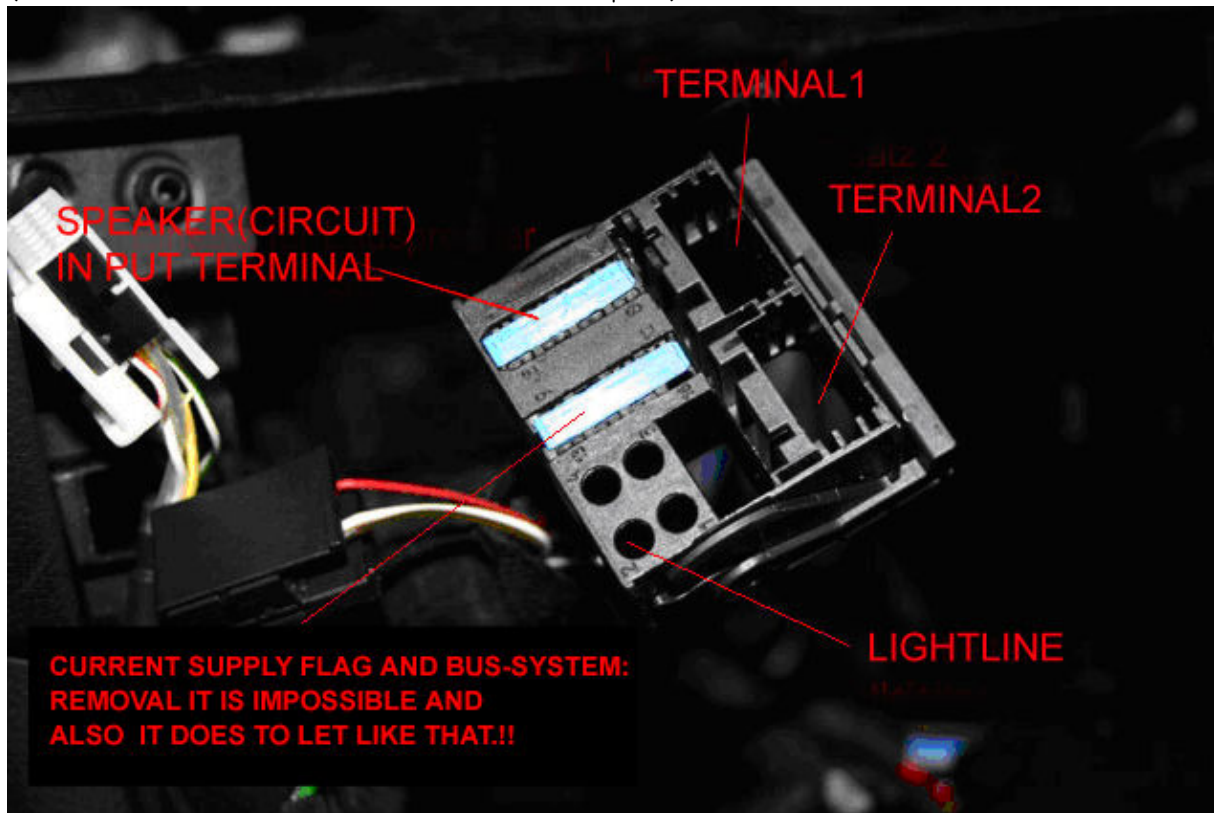



Now, you connect only the light.
The interface must be fed into the Most ring into row.

Vehicles without Most components, no CD changer or no telephone, have light conductors at the CCC (Navi computer); these are closed however not in the ring.


After the connection of the interface you must close the most ring. You do this with a light wave bridge (short-circuit housing X13836 of the Flashadapter in the glove subject exchange). This option rare occurs.

Consider to the anger flesh ticket which points at an hour direction of light-wave line connection.

Connect structure:

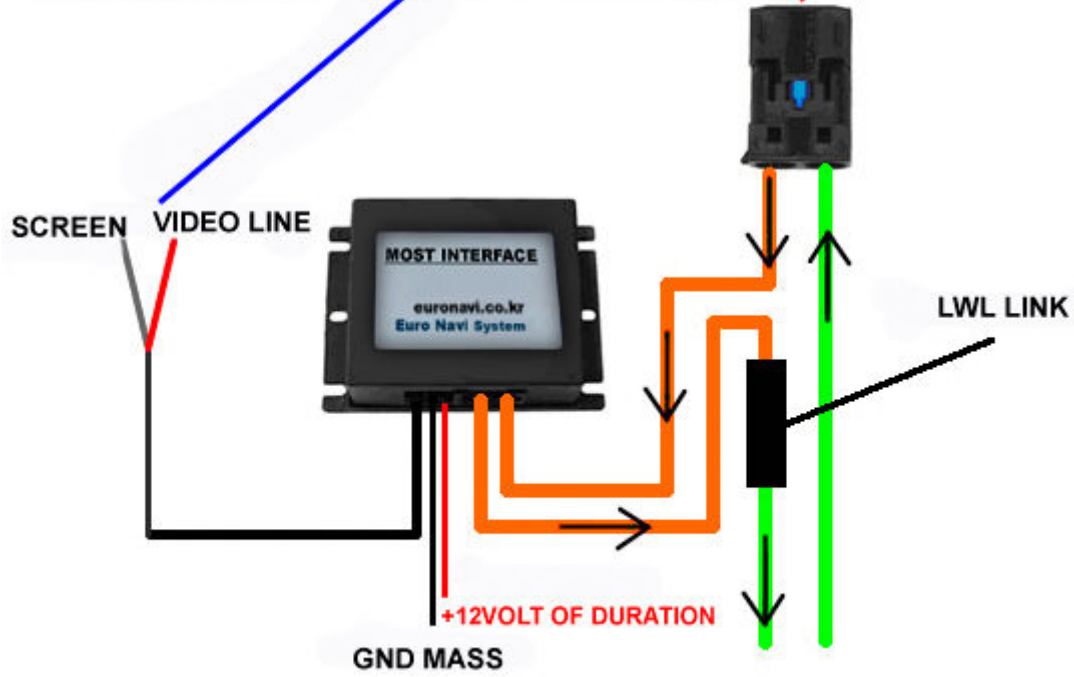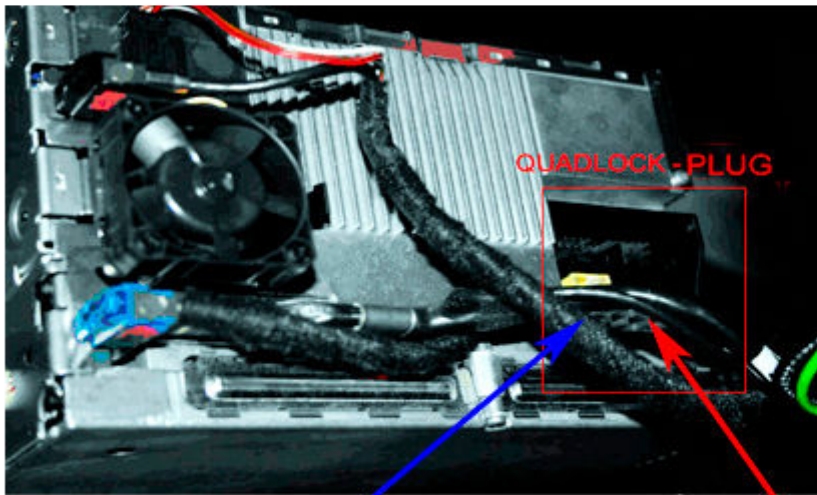

Management connection structure:

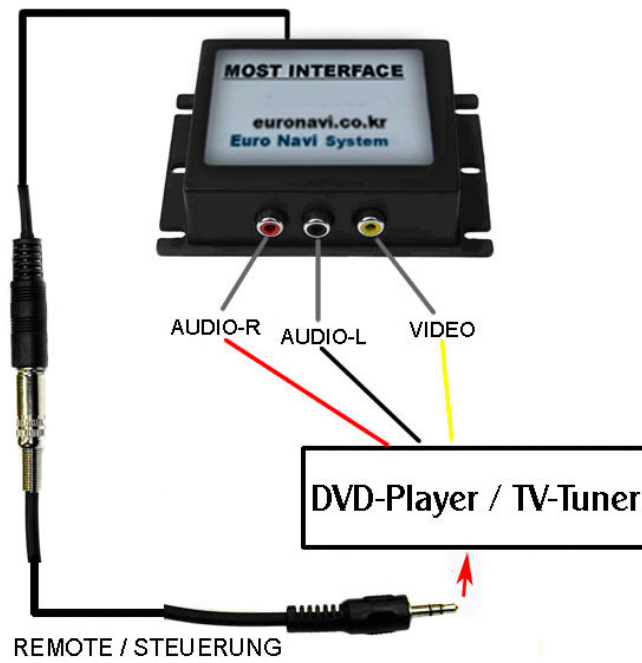

The opposition orders broad way establishes the whole system again!
It is a completion,