
*Necessary preliminary tasks:*

- Remove rear bumper trim.

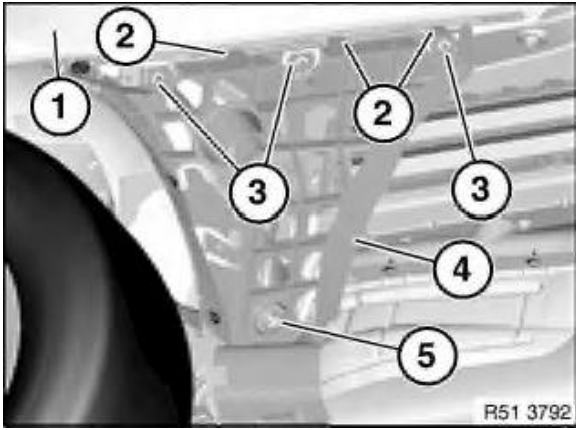

Release screws (3).

Release nut (5) and remove holder (4).

1 Side panel

*Installation:*

Catches (2) of holder (4) must not be damaged or missing.