

*Necessary preliminary tasks:*

- Remove rear bumper trim.

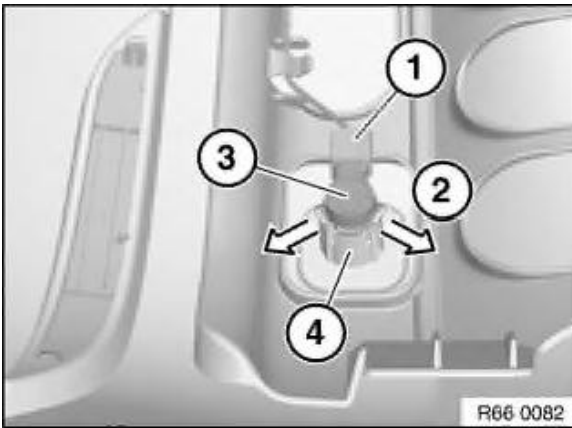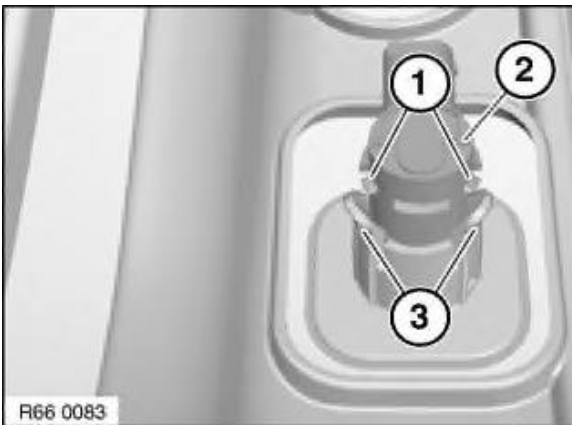

Unfasten plug connection (1) and disconnect.

Unlock catches (2) in direction of arrow and pull ultrasonic transducer (3) out of bracket (4).

*Installation:*

Retaining hooks (1) of ultrasonic transducer (2) must engage exactly in mountings (3).