



**Important!**

Proceed with care so as to avoid damaging the on-board monitor and adjoining trims.

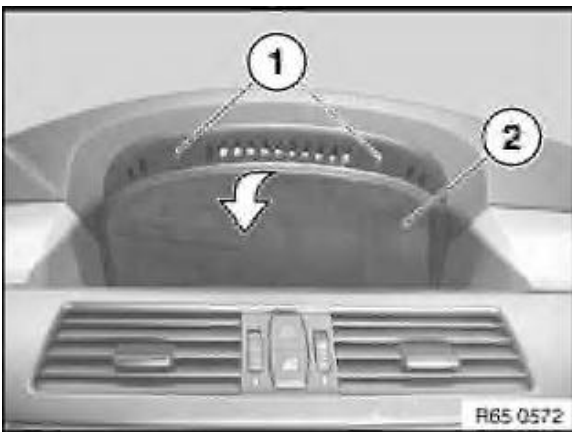

Release screws (1).

Fold out on-board monitor (2) in direction of arrow.

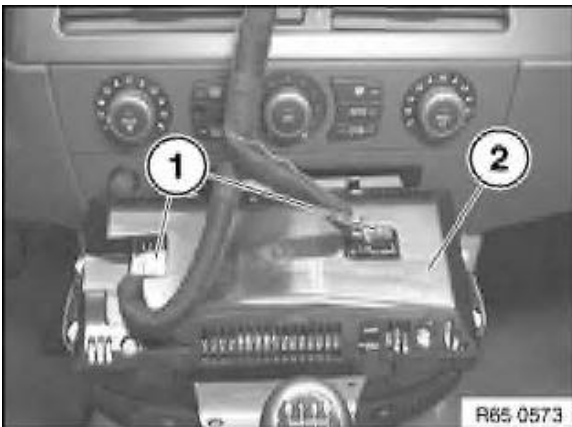

Unlock plug connections (1) and disconnect.

**Installation:**

Ensure correct cable routing.

Remove on-board monitor (2).



Replacement:  
Carry out programming/coding.