
*Necessary preliminary tasks:*

- Remove front door trim panel


Security version:

Cover is designed as armour plating and bonded to door window frame, replacement is not possible.

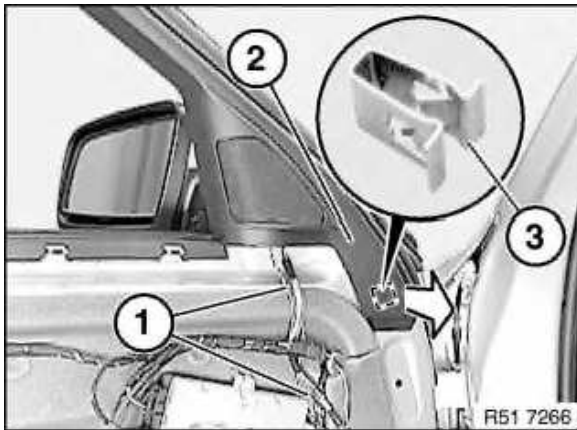


Feed out cable (1).

Lever cover (2) in direction of arrow out of retainer (3).

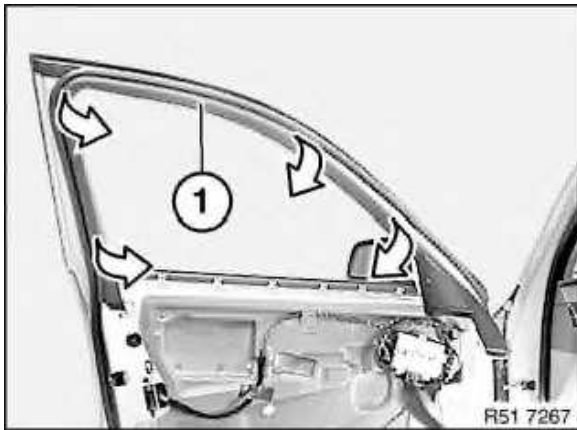

Lever cover (1) out of front door.

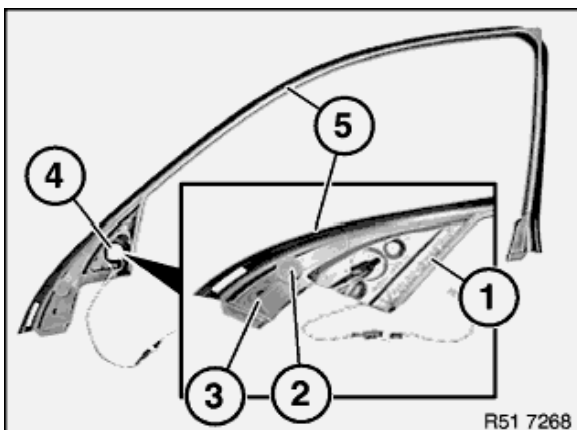*Installation:*

Following parts of cover (5) must not be damaged or missing:

- 1 Sound insulation
- 2 Foam
- 3 Bridge

Replacement only:

Remove speaker (4) .