


## Battery Specification Sheet FP-AGML5/49

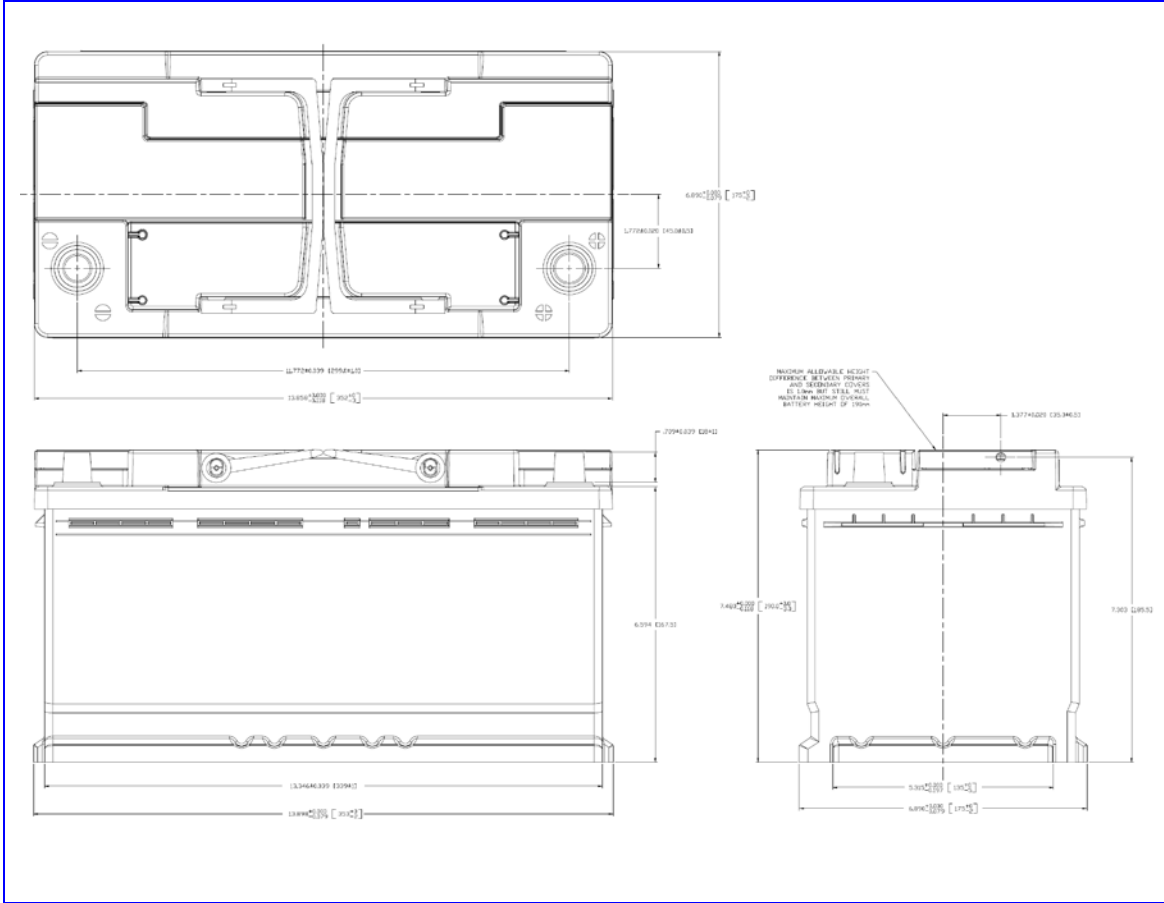

|                                    |                          |
|------------------------------------|--------------------------|
| BCI Group Size                     | L5/49                    |
| Nominal Voltage                    | 12 V                     |
| Length                             | 352 mm / 13.9 "          |
| Width                              | 175 mm / 6.9 "           |
| Height to cover                    | 190 mm / 7.5 "           |
| Total height                       | 190 mm / 7.5 "           |
| Approximate weight                 | 27.1 kg / 59.8 lb        |
| Handle Option                      | Yes                      |
| SAE CCA (-18°C / 0°F)              | 850 A                    |
| SAE CA (0°C / 32°F)                | 1020 A                   |
| SAE RC (27°C / 80°F)               | 160 Min                  |
| Ref. Ah Capacity 20HR              | 90 Ah                    |
| Float voltage (27°C / 80°F)        | 13.5 - 13.8 V            |
| Cycling voltage (27°C / 80°F)      | 14.1 - 14.4 V            |
| Maximum discharge current          | 1100 A (5s)              |
| Battery terminal type              | 1:9 SAE Post             |
| Electrolyte specific gravity range | 1.300 - 1.320            |
| Separator material                 | AGM - Absorbed Glass Mat |
| Battery container material         | Polypropylene            |
| Battery cover material             | Polypropylene            |
| Battery type                       | AGM - Absorbed Glass Mat |
| Positive grid alloy                | Lead Calcium             |
| Negative grid alloy                | Lead Calcium             |

The purpose of this specification sheet is to assist in the selection of batteries. This information is published as a general guide to the public. Design, features and specifications are subject to change without notice. We disclaim any representation or warranty, express or implied, concerning the specification sheet or recommendations, and in no event shall be liable for any loss or damage claimed to have arisen as a result of the use of this specification sheet.