

*Necessary preliminary tasks:*

- Remove handle

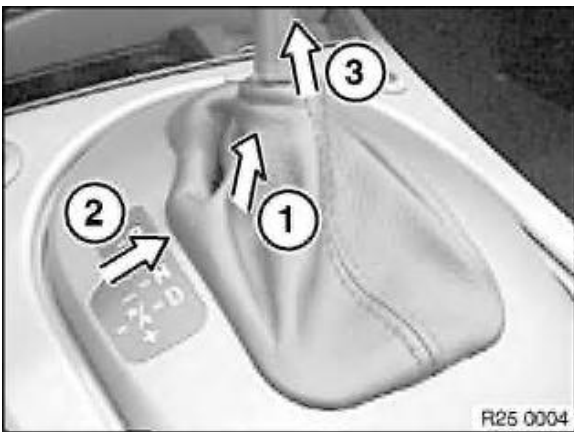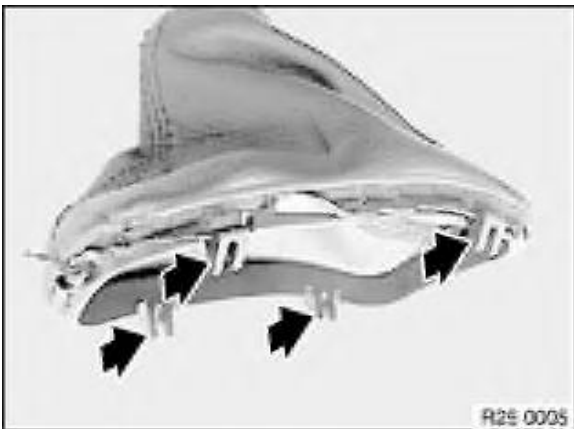

1. Carefully pull gaiter taut on leather.
2. Press frame inwards slightly until catch is released.
3. Lift out gaiter.

**Installation:**

Retaining lugs must not be damaged.