



*Necessary preliminary tasks:*

- Remove front door trim panel.

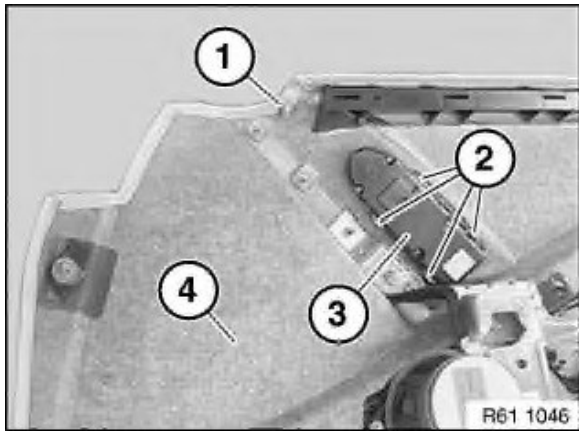

Unscrew nut (1).

Unlock catches (2) and remove rocker switch for side window operation (3) downwards out of front door trim panel (4).

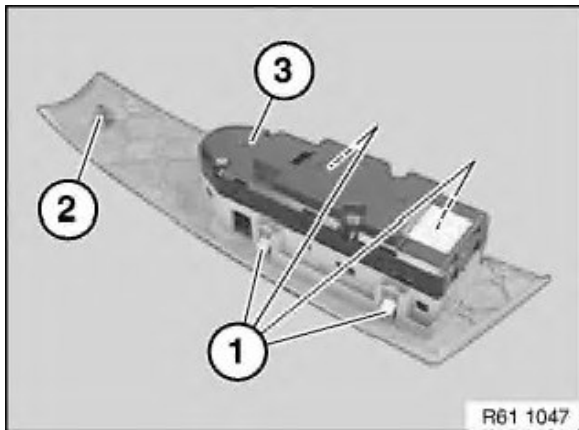

*Installation:*

Retaining hook (1) and plastic pin (2) must not be damaged.

Make sure rocker switch for side window operation (3) is installed in correct position.