


51 45 185 Removing and installing/replacing trim for pedal assembly

Special tools required:

- [00 9 317](#)



Note:


Move driver's seat completely towards rear.

Drive bottom trim (1) towards rear with special tool [00 9 317](#) and remove.

Installation:

Make sure bottom trim (1) is correctly seated at retaining points (2).

Feed bottom trim (1) correctly into trim for pedal assembly (3).


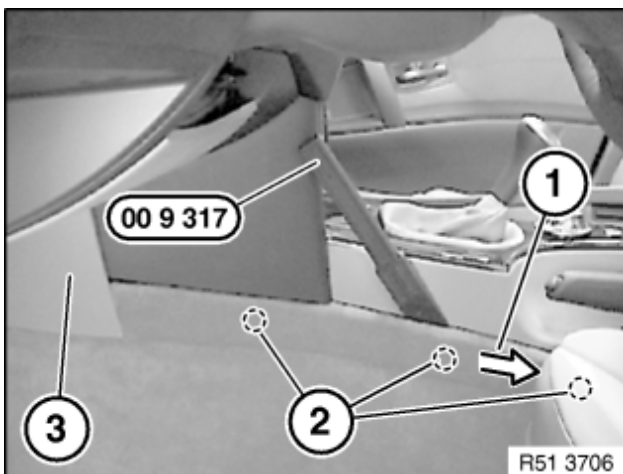


Release screws (1).

Unclip trim for pedal assembly (3) at retaining points (2) in direction of arrow.

Pull back trim for pedal assembly (3).

Disconnect associated plug connections and remove trim for pedal assembly (3).

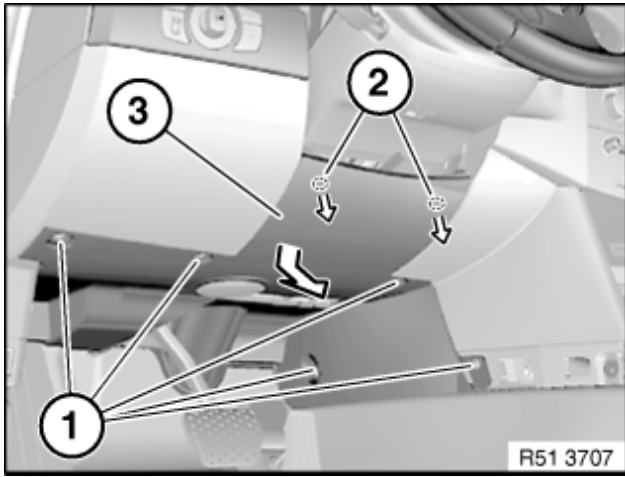

Replacement:

- Remove [speaker for hands-free system](#)
- Remove [footwell light](#)