

*Necessary preliminary tasks:*

- Detach wheel arch cover from front/rear side member cover

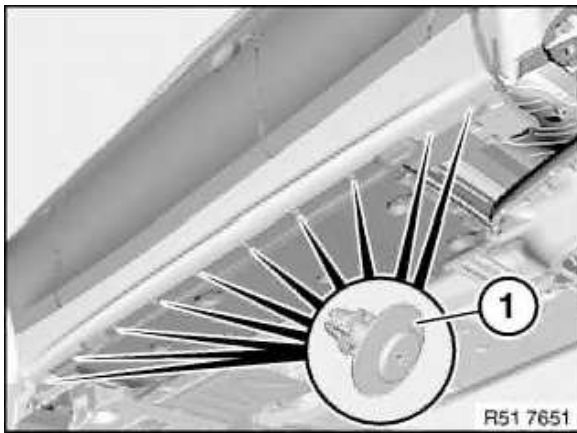


Release screws (1).

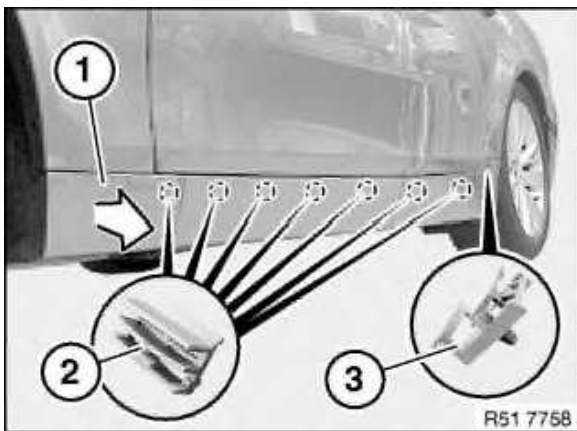


Unclip rear panel (1) from holder (3).

Unclip panel (1) at holders (2) and remove in direction of arrow.

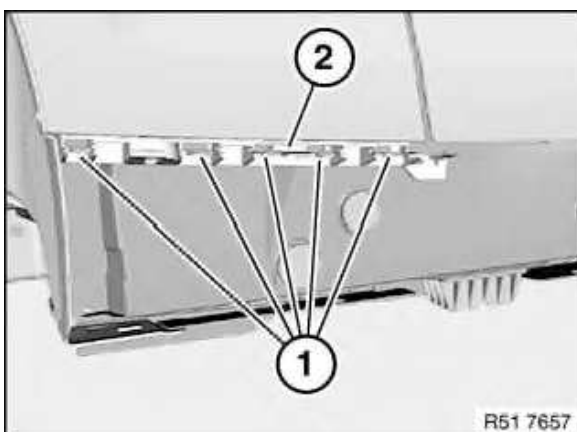*Installation:*

Catches (1) on holder (2) must not be damaged.

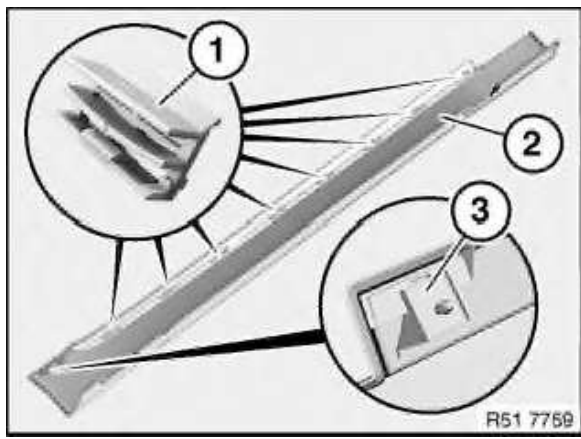

*Installation:*

If necessary, detach holders (1 and 3) from body and fit on panel (2).

If necessary, replace faulty holders (1 and 3).