



**Important!**

Observe safety instructions for raising the vehicle.

Driving without reinforcement plate is not permitted!

*Necessary preliminary tasks:*

- Remove underbody protection at front and rear

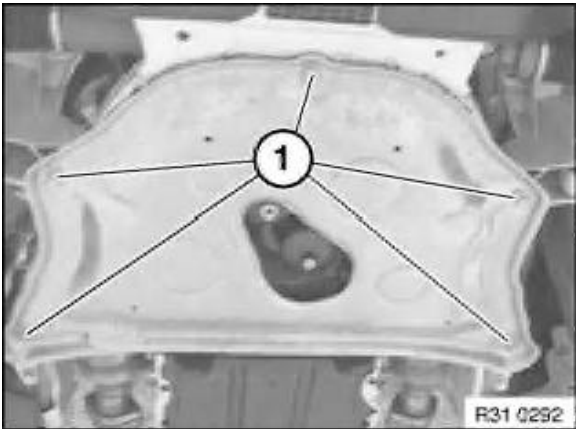

Release screws (1).

Remove reinforcement plate.

*Installation:*

Tightening torque 31 10 9AZ .