


Lever out seal plug (1).


Release screws (2), tightening torque 51 71 2AZ .

Feed rear spoiler towards rear out of rear lid.

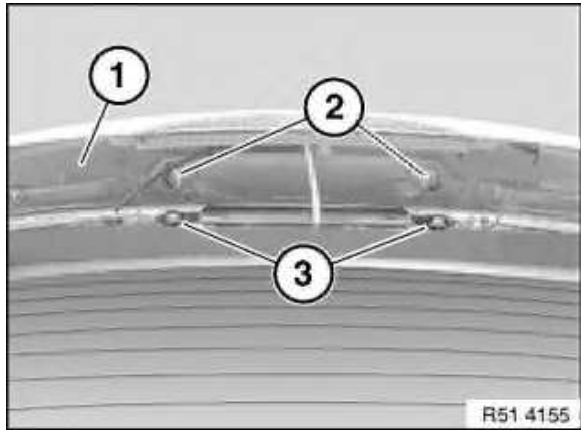

*Installation:*

Fit rear spoiler (1) so that mounts (2) can slide into associated guides (3).

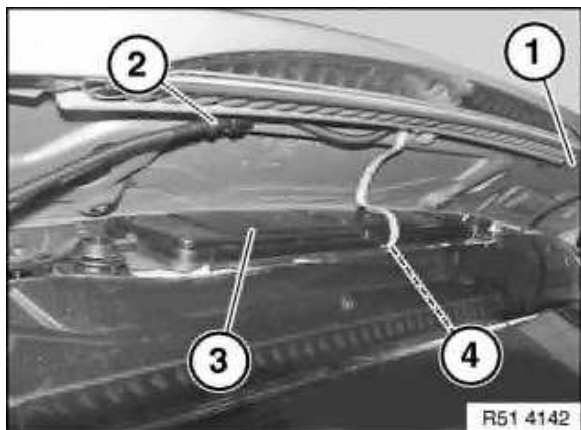

Raise rear spoiler slightly as shown.

Unfasten plug connection (1) and disconnect.

Disconnect hose (2).

Remove antenna amplifier cover (3) in upwards direction.

*Installation:*

Make sure antenna amplifier cover (3) is exactly seated.

Unfasten plug connection (4) and disconnect.

Remove rear spoiler in upwards direction from rear lid and set down on a clean surface.