


Necessary preliminary tasks:

- Remove luggage compartment wheel arch trim on left.

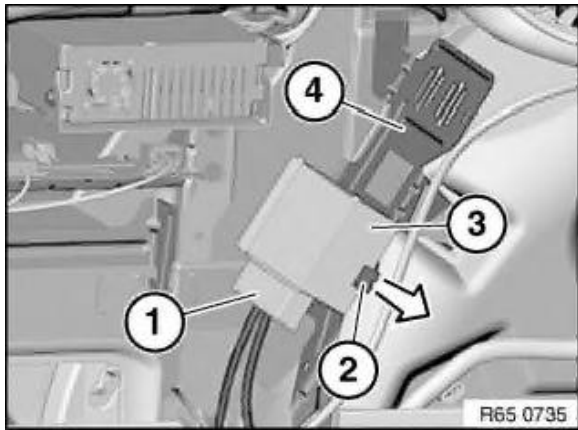

Unfasten plug connection (1) and disconnect.
Pull out retaining plate (2) in direction of arrow.

Installation:

Make retaining plate (2) is correctly seated.

Remove amplifier (3) from holder (4).