

*Necessary preliminary tasks:*

- Remove luggage compartment trim on side panel on right
- Disconnect battery negative lead
- Remove middle trim for instrument panel

*Note:*

Comply with notes and instructions on handling optical waveguides.

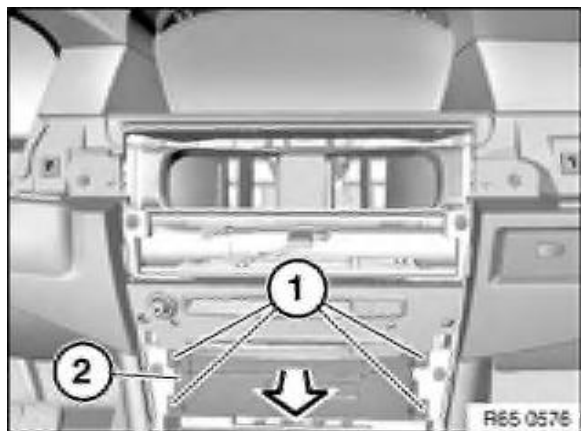

Release screws (1).

Important!

Do not scratch center console trim, cover if necessary.

Pull back Car Communication Computer (2) slightly.
Unlock associated plug connections and disconnect.
Remove Car Communication Computer (2).



Replacement:
Carry out programming/coding.